



FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Graphics (option)
- Minimum icebuild-up
- Eye Catching design
- LED internal light
- 70 mm insulation
- Auto Defrost (option)
- Switch mode between cooling and freezing (option)

| GSM | HIGH VOLUME AND PERFECT DISPLAY




CONTROLLER




GSM 200



GSM ISLAND

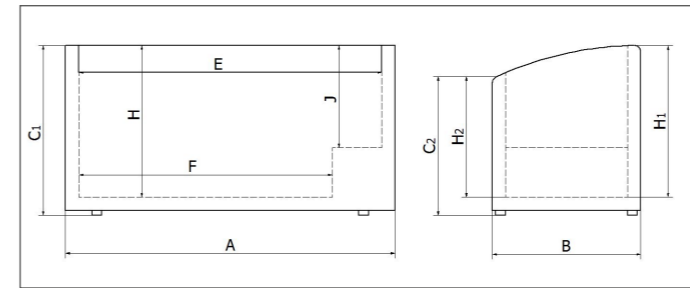

Dimensions according to technical datas below

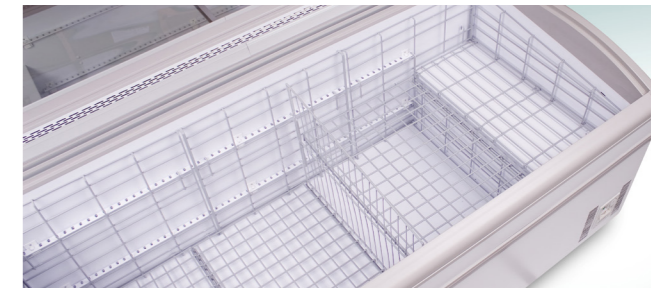

	GSM 150	GSM 200	GSM 250	GSM 197
Climate class	3LN1	3LN1	3LN1	3LN1
Ambient temp. range	+10 to +25	+10 to +25	+10 to +25	+10 to +25
Climate class 4 and 7 (4+)	Optional	Optional	Optional	Optional
Gross volume, litres	590	800	800	540
Net volume, litres	400	580	580	470
Temperature range inside unit	-18 to -28	-18 to -28	-18 to -28	-18 to -28
Refrigerant: R290	Yes	Yes	Yes	Yes
Number of compressors	2	2	2	2
Energy consumption / 24 h kwh for R290	5,8/4,3	6,6/5,5	7,1/6,2	6,3/5,7
Input power (watt) R290	430/374	484/418	501/435	467/400
DIMENSIONS				
External dimensions (WxDxH)	1520x920x790	2020x920x790	2500x920x790	1990x920x790
Internal dimensions (WxDxH)	1364x775x720	1864x775x720	2344x775x720	1830x775x720
Dimension A	1520	2020	2500	1990
Dimension B	920	920	920	920
Dimension C1	790	790	790	790
Dimension C2	710	710	710	710
Dimension E	1364	1864	2344	1830
Dimension F	1054	1554	2034	1520
Dimensions H1	720	720	720	720
Dimension H2	640	640	640	640
Dimension J	438	438	438	438
Insulation, mm	70	70	70	70
ACCESSORIES				
Number of baskets: standard / maximum	0/3	0/5	0/7	0/0
Number of dividers: standard / maximum	0/2	0/2	0/2	0/2
Feet	Incl.	Incl.	Incl.	Incl.
Lock	n/a	n/a	n/a	n/a
Bumper bar	Incl.	Incl.	Incl.	Incl.
Price ticket holder	Optional	Optional	Optional	Optional
Single or double shelf	Optional	Optional	Optional	Optional
LED light	Incl.	Incl.	Incl.	Incl.
Digital controller	Incl.	Incl.	Incl.	Incl.
Graphics	Optional	Optional	Optional	Optional
OTHER DATA				
Outer cabinet	White	White	White	White
Inner cabinet	White	White	White	White
Type of cooling	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual
Auto defrost	Optional	Optional	Optional	Optional
Power	230 v/ 50 Hz	230 v/ 50 Hz	230 v/ 50 Hz	230 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional
Net weight	98	127	150	121
Gross weight	129	161	190	155
SHIPPING				
20' cont. Capacity	12	12	8	12
40' cont. Capacity	28	24	16	22
40' HC cont. Capacity	42	33	24	33
Standard Trailer capacity	48	39	30	39